rotronic

Datenblatt - Fiche technique - Data sheet

11.01.3660

ROLINE RS232 Kabel ST-BU

ROLINE Câble RS-232 M/F

ROLINE RS232 Cable, M – F

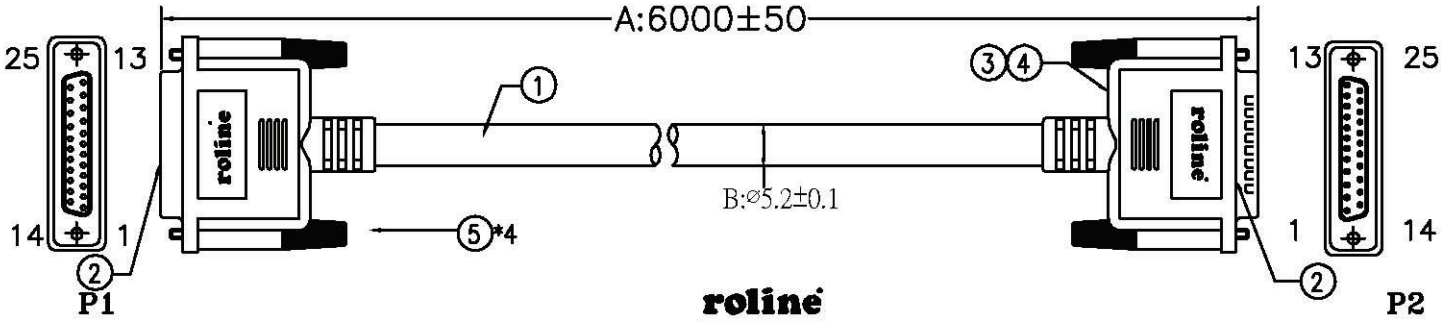

roline
connector with ROLINE LOGO

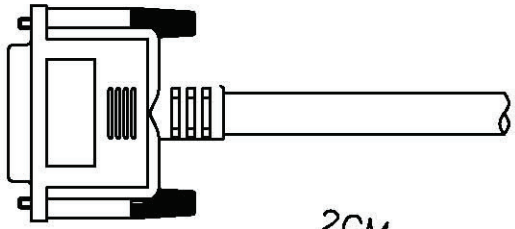

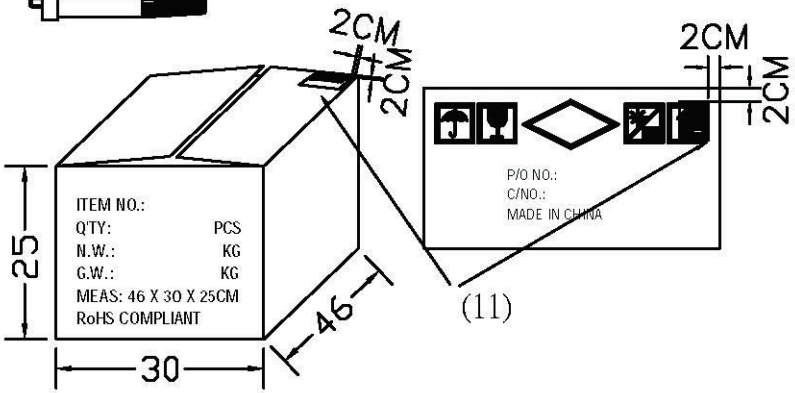

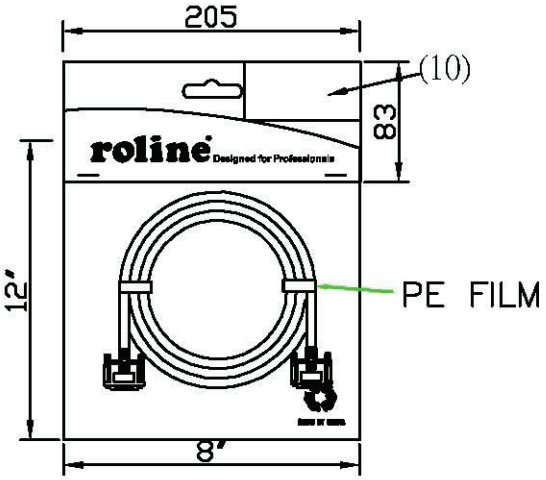

PINOUT DIAGRAM:

P1 DB25F	P2 DB25M
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
⋮	⋮
25	25
SHELL	SHELL

NOTES:
1) CORE WIRE COLOR: STANDARD COLOR.
2) P1 P2 DIE NO:OD25A11
3) PRIMARY DIMENSION:A,B
4) ROHS & REACH COMPLIANT

REV.	ECR	DESCRIPTION	C.N.	DATE
B			FOO	2012/07/10

4	OUTER JACKET PVC 45P BEIGE(2209) (ROHS)
3	DB25F BLUE SOLDER TYPE BRASS TERMINAL GOLD FLASH (ROHS)
2	DB25M BLUE SOLDER TYPE BRASS TERMINAL GOLD FLASH (ROHS)
1	NON UL 28#25C+AD OD:5.2MM BEIGE(2209) 6000MM (ROHS)

Rotronic Co., Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01mm	±0.20mm
MATERIAL	MATERIAL
FINISH	FINISH

TITLE: RS232 Cable DB25M/DB25F, NON-UL, OD:5.2MM, 6.0M, COLOR BEIGE

CHKD. | CONF.

DR. FOO | APPD.

PART NO. 11.01.3660

SCALE | SHEET 1/1 | UNIT MM | SIZE A4 | REV. B